



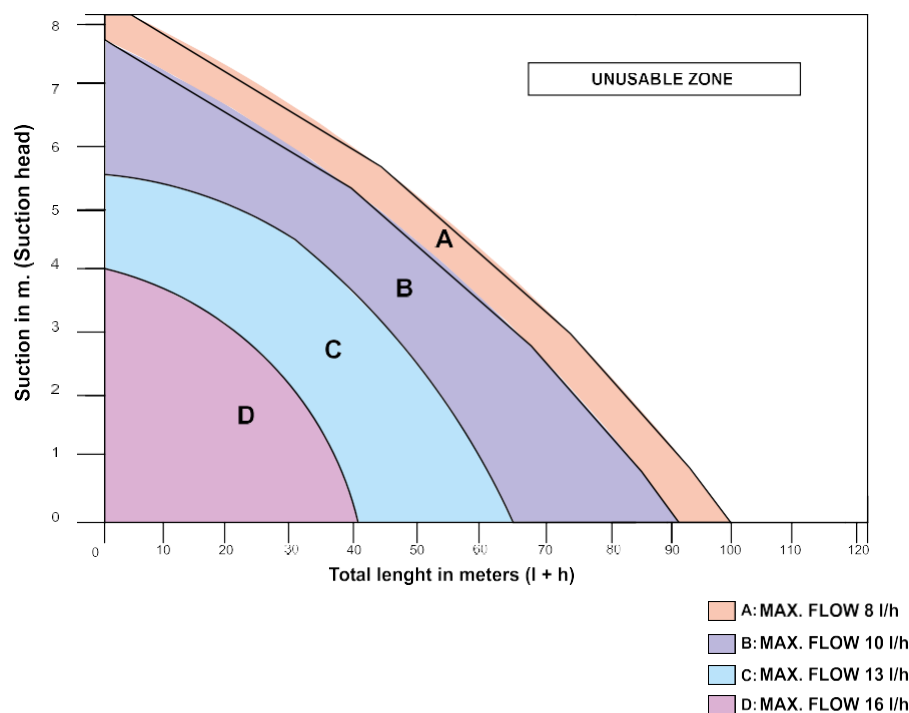


OIL SUCTION TRANSFER UNIT GPS-10

PUMP TYPE	Suction Solenoid Pump	
LIFTING HEIGHT (MAX.)	8 m vertical (8 mm I.D. tube)	
MÁX. HORIZONTAL DISTANCE	100 m horizontal (8 mm I.D. tube)	
OUTLET FLOW RATING (8 mm I.D. tube)	8 L/hr at: 8 m vertical & 25 m horizontal 15 l/hr at: 5 m vertical & 25 m horizontal	
INLET CONNECTION	3/8 " F BSP	
OUTLET CONNECTION	3/8 " F BSP	
OVERFLOW OUTLET CONNECTION	½ " F BSP	
POWER SUPPLY	AC 230V, 50Hz	
POWER CONSUMPTION	50 W	
RESERVOIR TOTAL CAPACITY	GPS 10	GPS 10 MAXI
	3,5 Litre.	12 Litre
	Width: (240 mm)	(350 mm)
	Depth: (130 mm)	(225 mm)
DIMENSIONS: Height:	(335 mm)	(345 mm)
WEIGHT	3 kg	4 kg
FUEL TYPE	Kerosene, Diesel Oil & HVO	

SUCTION DIAGRAM

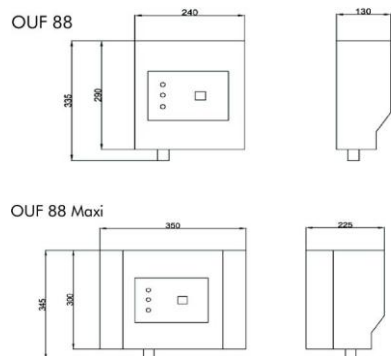

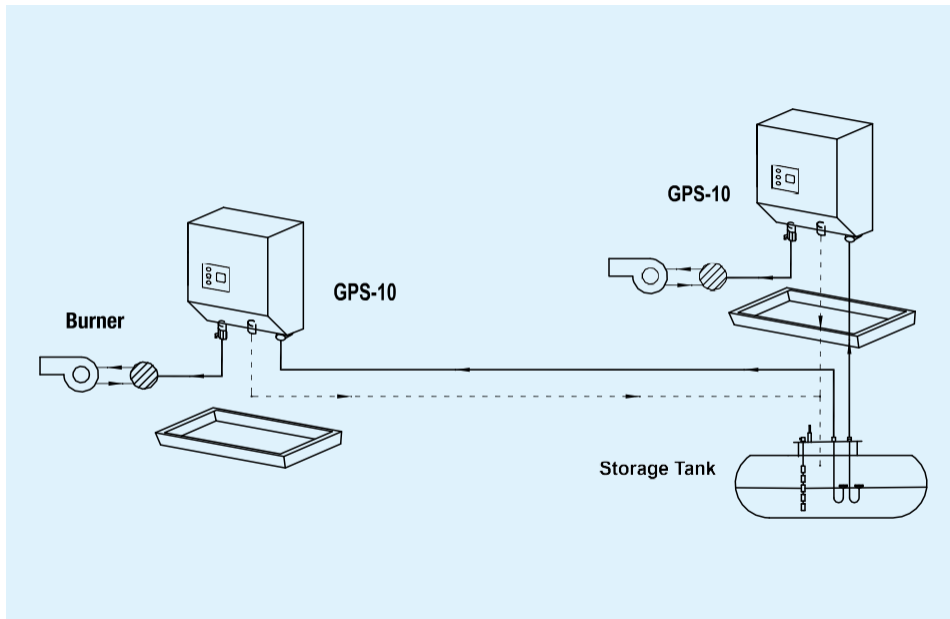

Scope of delivery

Single unit, 230V single-phase powered, 3.5 litre reservoir, motor 230 V/20 watts, solenoid piston pump with non-return valve, filter, level switch (4 switching points = 2 x operation, 2 x safety), incl. oil drain tray and leakage oil detector, mounted ready for connection, for wall mounting. All units are built and tested according to DIN EN 12514-1.

GPS10 control board with solenoid valve output to be used if storage tank level is above GPS10 Level

Accessories

- Fuel oil filter with recirculation inlet from burner 3/8"
- Solenoid valve 3/8" 230 V, normally closed



C/Invierno, 4-6 28500
 Arganda del Rey. Madrid (Spain)
 Telf.: (+34) 918 719 294
 info@inprord.com
 www.inprord.com



63457 Hanau - Voltastr, 10
 Deutschland (Germany)
 Telf.: (+49) 06181/9587-0
 info@simka.de
 www.simka.de